


203

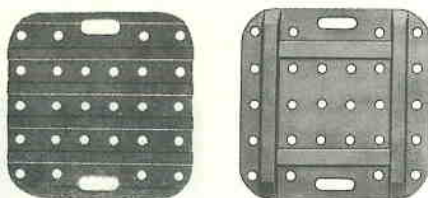

Roller track plates of light metal, beech wood or heat-resistant fibroconcrete

lightweight, very durable, wide variety of shapes, rectangular, square, with round edges, with holes and ribs, or only with ribs, with and without hand hole.

Please specify quantity!

203A




Light-metal core drying plates

for use in the core-shop, torsion-proof

Practical, light-weight, long-life, in several models and dimensions.

On request. Please specify quantity!

204



Pattern plates made of laminated resin/wood (plywood)

for all types of molding and compaction systems.

We supply: a) standard sizes, not machined in different thicknesses 6 to 100 mm

b) standard sizes machined (cut sizes and/or machined to exact required thickness)

c) machined ready to use acc. to your drawing or description, drilled or fitted with bushes.

On request! Please specify quantity, sizes and type of machining.

204A




Moldingplates/Gassingplates

made of material 'S', technical and economical reasonable, high abrasion resistance, slow slide friction coefficient, no moisture absorption, density 0,96, absolutely tight against gas.

Sizes: 500 x 1000, 1000 x 1000, 1000 x 2000, 650 x 6000 mm

Thicknesses 2 – 250 mm or according to your drawing, also machined ready to use.

205

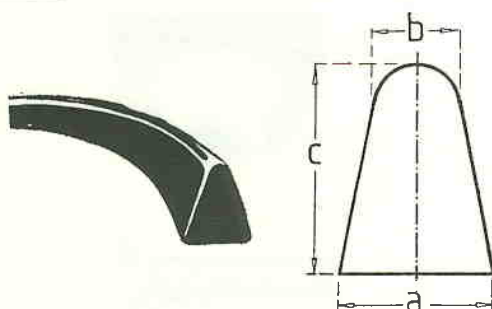

Casting ducts

of soft PVC

sold per meter, max. temperature 100°C, durable and reusable. The ducts can easily be fixed on moulding plates; they can easily be removed from the mould thanks to its smooth, wear-resistant surfaces. Bending these ducts does not produce creases.

Item No.	Base (a) mm	Radius (b) mm	Height (c) mm	Cross section mm ²
205.001	10	3,5	10	75
205.002	12	4,0	13	116
205.003	14	4,0	17	168
205.004	20	5,0	22	294
205.005	22	6,0	23	346
205.006	24	7,0	26	438
205.007	30	10,0	35	782

206



Sealing ropes, asbestos-free

(for sealing mould boxes)

ready for use in cardboard boxes containing 80 cm lengths, consisting primarily of modified mineral oil fractions and selected silicates, practically unlimited storage life, stays flexible and soft – even under extreme temperature fluctuations, perfectly seals mould box halves, guarantees accurate and precise castings, prevent losses and intrusion of liquid metal into air ducts.

Item No.	206.003	206.004	206.0045	206.005	206.006	206.007	206.008	206.009
Dia.	3 mm	4 mm	4,5 mm	5 mm	6 mm	7 mm	8 mm	9 mm
Pack. cont.	672 mtr	604 mtr	499 mtr	414 mtr	307 mtr	394 mtr	312 mtr	249 mtr

Item No.	206.010	206.012	206.014	206.016	206.018	206.020	206.024
Dia.	10 mm	12 mm	14 mm	16 mm	18 mm	20 mm	24 mm
Pack. cont.	211 mtr	158 mtr	112 mtr	83 mtr	67 mtr	62 mtr	36 mtr