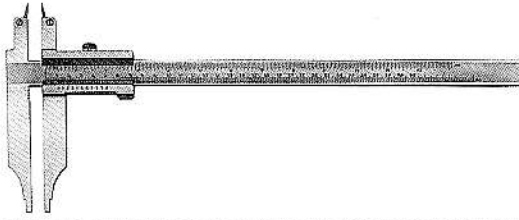


597

Pattern maker's slide gauges without shrinkage graduation of dull chrome-plated stainless steel

1/20 vernier, as described under No. 596 (p. 23)

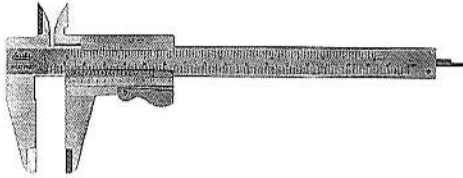
Graduation		Measuring range mm				
front	top	300	500	600	800	1000
bottom	inch	Item No.				
mm	inch	597.501	-	-	-	-
mm	-	-	597.502	597.503	597.504	597.505

Spares as mentioned under Item No. 596

598

Wall thickness calipers Item No. 598.001

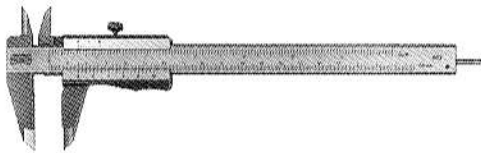
fits all pattern maker's slide gauges with 250 and 300 mm measuring range; for internal and external measurements

599

Pattern maker's pocket slide gauges with shrinkage graduation

of dull chrome-plated stainless steel, accuracy in accordance with DIN 862, 1/20 vernier, with locking screw, measuring range 150 mm, jaw length 40 mm

Item No.	599.001	599.002	599.003	599.004	
Grad. front	top	1,0 % SM	1,25 % SM	1,5 % SM	2,0 % SM
	bottom	mm-graduation			
back		mm-depth gauge			

600

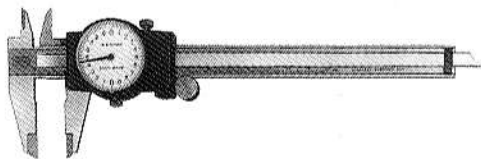
Precision pocket slide gauges

without shrinkage graduations, of dull chrome-plated stainless steel, accuracy in accordance with DIN 862, precise laser graduation, measuring faces hardened and lapped

Measuring range 150 mm, jaw length 40 mm

Four applications: ext., int. and depth measurements as well as marking.

Graduation			Item No.	
front top	front bottom	back	with locking screw	with quick level
inch with 1/128 vernier	mm with 1/20 vernier	mm-depth	600.001	600.002

601

Precision dial slide gauges No. 216 RC

stainless steel dull chrome-plated, measuring accuracy better than DIN 862, with measuring edges for internal gauging, in a case.

One dial rev. = 5 mm; dial numbers indicate full mm, one grad. = 1/2 or 0,5 mm.

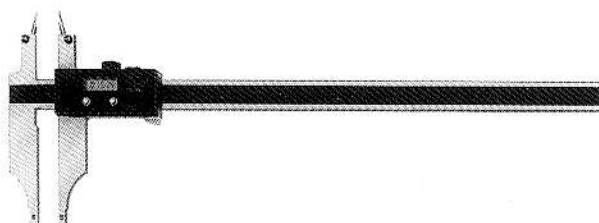
Measuring range mm	Reading precision mm	Jaw length mm	Item No.
160	1/20	40	601.501

Dial slide gauges with larger measuring ranges upon request.

602

Workshop slide gauges marking gauges etc.

in all sizes and designs available upon request.

603

Pattern-makers slide gauges with digital indicator

with steel points, without shrinkage, with TOP electronic unit with the following characteristics: LCD display 6 mm, on/off switch, long-life 3V Lithium battery (Type CT 2032) easy exchangeable, Hold function, Zero setting at any position, data output opto RS 232 for direct connection to PC or printer without interface.

Accuracy acc. to DIN 862: up to 600 mm measuring range: 0,03 mm, for 600 – 1000 mm: 0,04 mm.

Made of best qualified stainless steel, carefully hardened.

Measuring range mm	Jaw length mm	Stepped jaws mm	Item No.
300 mm	90 mm	10 mm	603.201
500 mm	125 mm	20 mm	603.202

For calibration see page 23, Item No. 594