


Dust-free polystyrene cutting with the unique dust exhaust system (continued)

752A



Cutter motor with hollow shaft

which can be fitted to conventional cutters


Accessories: 1 clamping nut, 2 hook wrenches

Technical data	Item No.	
	752.002	752.005 ¹⁾
Motor power	1,1	4,4
Voltage	230/400 ²⁾	230/400 ²⁾
Frequency	50	200
No. of revs. ³⁾	3000 - 6000	2000 - 12000

¹⁾ tube used with a suitable frequency converter (not included in the supply)

²⁾ or spec.

Suitable motor holders can be supplied upon request.




Special switch

with brake for cutter motor and hollow shaft

Item No. 752.003

752B

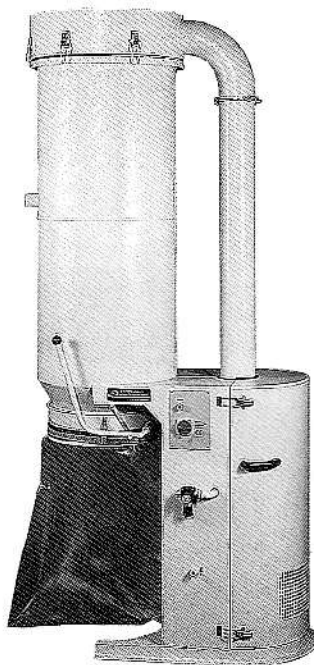

752.006

Highly effective suction systems

to be used with cutting machines BW 900 and cutter motors with hollow shafts

1) Item No. 752.006

Contained parts:

- Separator of shavings, volume 250 ltrs.
- Compact sheet-filter
- Highly effective compressor
- trap to empty the separator during stillstand into a plastic bag or a main suction
- automatic filter-cleaning
- Suction hose dia. 50 mm, length 5 m

Optional:

- Set of 100 pieces plastic bags, 1000 x 1500 mm, volume ab. 400 ltrs, **Item No. 752.007**


Technical data:

Power: 5,5 kW
 Tension: 400V
 Frequency: 50 Hz
 Air consumption: max. 10.000 l/min
 Underpressure: max. 300 mbar
 Dimensions: 1100 x 600 x 2600 mm
 (L x W x H)
 Colour: RAL 7035 (light grey)

2) Item No. 752.008

Contained parts:

- Highly effective suction
 - Power: 5,5 kW
 - Tension: 400 V
 - Frequency: 50 Hz
 - Air consumption: max. 10.000 l/min
 - Underpressure: max. 300 mbar
 - Colour: RAL 7035 (light grey)
- Separator for shavings
- Suction hose dia. 50 mm, length 6000 mm
- Suction hose dia. 70 mm, length 7000 mm
- Additional silencer

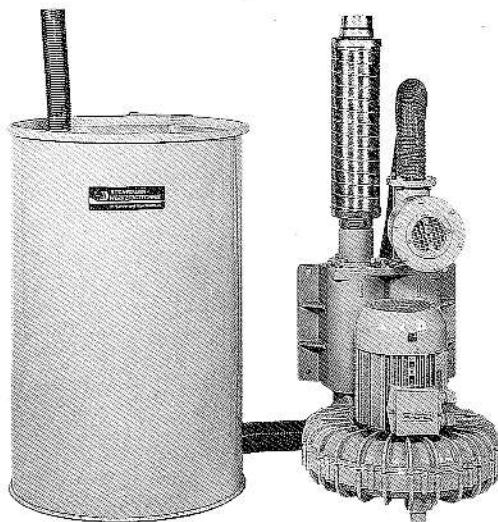

752.008