



Hollow cutters with rasp cut for milling machine BW 900 and motors with hollow shafts

- quick clean-out of rigid foam material
- accurate, dimensionally precise milling results
- a polished, flow-optimized suction channel with suction openings ensures a clean work area
- composite hollow cutters enable exchange of milling cutter tips

Different head-types available

T = Useful cutting depth	Head type	D = Diameter / Item No.						
		15 mm	20 mm	30 mm	40 mm	45 mm	50 mm	60 mm
120 mm	W	752.011	-	-	-	-	-	-
	X	752.012	-	-	-	-	-	-
	Y	752.013	-	-	-	-	-	-
	Z	752.014	-	-	-	-	-	-
200 mm	W	-	752.021	752.031	752.041	752.051	752.061	752.071
	X	-	752.022	752.032	752.042	752.052	752.062	752.072
	Y	-	752.023	752.033	752.043	752.053	752.063	752.073
	Z	-	752.024	752.034	752.044	752.054	752.064	752.074
250 mm	W	-	752.081	752.091	752.101	752.111	752.121	752.131
	X	-	752.082	752.092	752.102	752.112	752.122	752.132
	Y	-	752.083	752.093	752.103	752.113	752.123	752.133
	Z	-	752.084	752.094	752.104	752.114	752.124	752.134
300 mm	W	-	-	752.141	752.151	752.161	752.171	752.181
	X	-	-	752.142	752.152	752.162	752.172	752.182
	Y	-	-	752.143	752.153	752.163	752.173	752.183
	Z	-	-	752.144	752.154	752.164	752.174	752.184
350 mm	W	-	-	752.191	752.201	752.211	752.221	752.231
	X	-	-	752.192	752.202	752.212	752.222	752.232
	Y	-	-	752.193	752.203	752.213	752.223	752.233
	Z	-	-	752.194	752.204	752.214	752.224	752.234
400 mm	W	-	-	-	752.241	752.251	752.261	752.271
	X	-	-	-	752.242	752.252	752.262	752.272
	Y	-	-	-	752.243	752.253	752.263	752.273
	Z	-	-	-	752.244	752.254	752.264	752.274
450 mm	W	-	-	-	752.281	752.291	752.301	752.311
	X	-	-	-	752.282	752.292	752.302	752.312
	Y	-	-	-	752.283	752.293	752.303	752.313
	Z	-	-	-	752.284	752.294	752.304	752.314
500 mm	W	-	-	-	-	752.321	752.331	752.341
	X	-	-	-	-	752.322	752.332	752.342
	Y	-	-	-	-	752.323	752.333	752.343
	Z	-	-	-	-	752.324	752.334	752.344
600 mm	W	-	-	-	-	-	-	752.351
	X	-	-	-	-	-	-	752.352
	Y	-	-	-	-	-	-	752.353
	Z	-	-	-	-	-	-	752.354

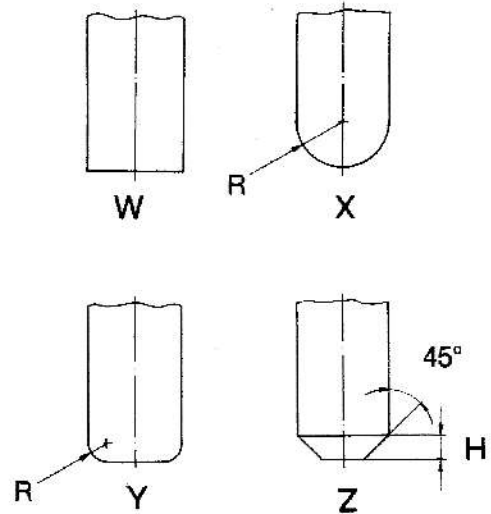

- Please state required head type (please indicate for type Y radius R and for type Z height H)
- Hollow cutters with tapered shape for pattern milling as well as other sizes and forms available on request.

Surface cutter heads (dia. 100 mm, toothed on the complete surface and 20 mm high on the periphery)

Item No.	752.391	752.392	752.393
H = Length mm	100	200	300

