


776**PFERD**

Accessory tools for Item Nos. 774 – 775

1) Flexible shafts (connector to motor acc. to DIN 10) cpl. with handle

Core of piano wire, core coupling M 10, protective hose of oil-resistant rubber, solid rubber coupling, 30 mm dia.

Core or protective hose cannot be repaired.

Item No.	776.101	776.102	776.103	776.104	776.105
Type	4 ZG DIN 10	7 ZG DIN 10	7 ZGU DIN 10	10 ZG DIN 10	12 ZGA DIN 10
Core dia. x length mm	4 x 1250	7 x 1500	7 x 2000	10 x 1500	12 x 2000
Protective hose dia. mm	13	18	18	22	25
Handle Item No.	4 ZGB	7 ZGA	7 ZGA	10 ZGE	12 ZGA
Handle coupling dia. x length mm	19,5 x 110	27 x 130	27 x 130	33 x 170	33 x 162
Handle connector	G 16	G 22	G 22	G 28	G 28
Handle coupling dia. mm	16	22	22	28	28
Standard collet mm	6	6	6	6	12
Optional available collets mm	1/1,5/2/2,5/3/3,5/4/5	1/2/2,5/3/3,5/4/5/7/8/9		3/4/5/6/7/8/9/10	
Max. speed revs/min.	40.000	25.000	25.000	18.000	12.000
Weight kg	0,6	1,5	2,0	2,5	4,25

Rigid or flexible extensions available upon request!


2) Ready-to-be-installed cores

Item No.	776.601	776.602	776.603	776.604	776.605
For shaft	4 ZG	7 ZG	7 ZGU	10 ZG	12 ZGA




3) Angle tool holder

Item No.	776.201	776.202	776.204
Type	WZ 4A	WZ 7B	WZ 10B
For shaft	4 ZG	7 ZG / 7 ZGU	10 ZG / 12Z GA
Head height x length mm	43 x 111	55 x 157	55 x 166
Max. speed revs/min.	20.000	17.000	17.000
Weight kg	0,27	0,60	0,58

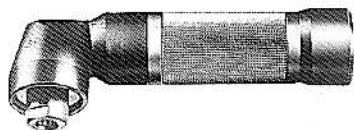

4) Chuck

Item No.	776.301	776.302
Type	207	208 A
Shaft dia. mm	6	12
Chuck range mm	0 - 6	0 - 13
Weight kg	0,14	0,40

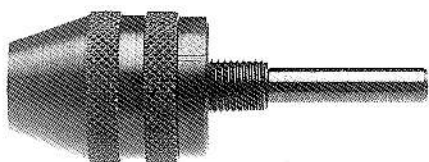

5) Flexible shaft grease

- Hose brushes for the shafts
- Non-fuzzing cleaning towels (package contains 2)
- Shaft grease FT 4 (appr. 450 gr. tin)

Item No.	776.402	776.403	776.404
For shaft	4 ZG	7 ZG / 7 ZGU	10 ZG / 12 ZGA

