


Oscillating bobbin sanding machine Type 'PRN'

A very wide range of operations is possible with this machine as well as full utilization of the abrasive paper thanks to the machine's vast set of interchangeable smoothing rollers and provision for vertical adjustment of the oscillating roller with respect to the work table. The bed-inclineable by means of a flywheel and can be displaced thus allowing a best inclination, even if it remains adherent to the roller.

All shafts are made of heat-treated, chrome-plated and ground steel so as to ensure minimum coefficient of friction, improved working life and fault-free operation.

Technical data:	
Table size	810 x 810 mm
Table tilting range	+30° / -15°
Amplitude of roller oscillation	25 mm
Vertical adjustment of roller	120 mm
Driving motor power	1,5 / 1,8 kW
RpM	1400 / 2800 U/min
Motor-power of aspirator	0,40 kW
Air flow	600 m ³ /h
Diam. of aspirator's connection	80 mm
Roller height (standard)	220 mm
Rollers of aluminium	40 - 50 - 60 - 70 - 80 - 100 - 120 - 150 - 180 mm ∅
Net weight	320 kg
Accessories upon request	
Rollers of rubber	120 mm high: 20 - 25 - 30 - 35 - 40 - 45 - 50 mm ∅
Rollers of aluminium	300 mm high: 40 - 60 - 80 - 100 - 120 - 150 - 180 mm ∅
Aspirator	
Dust collector	
Machine lamp	24 V

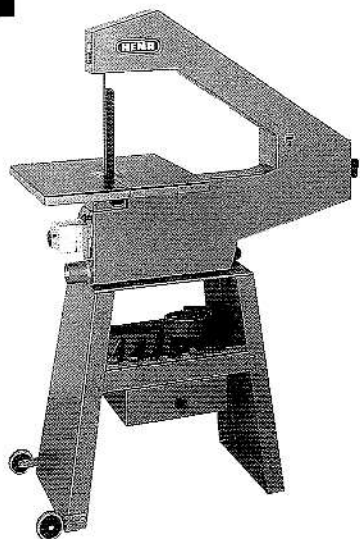

Contour belt sander PSM 300

With this machine all contour sanding jobs may be done perfectly, effective and reasonable.

- Automatic stretching of belts
- Very quick change of belts
- Sanding of interior contours with the same belt
- Quick-changing system of contour sticks

Technical data:

- Cast iron table, 480 x 480 mm, 45° inclineable, zero-stop with scale
- Motor 1,1 kW, 2800 RpM
- Very low noise level
- Sanding height max. 300 mm, height of contour sticks inside 170 mm, outside 245 mm
- Length of belts 2360 mm
- Relay to protect voltage drop
- Diameter of aspirator's connection 60 mm
- Connection for aspirator

Accessories:

- Contour sticks 25 mm width for inside and outside sanding; flat, round, convex, triangular
- Contour stick 50 mm width, flat, for outside sanding
- Belts 25 mm and 50 mm width
- Machine stand
- Driving device
- Drawer for tools
- Aspirator

Please ask for detailed offers for all machines!